


TIPPER CM 180 / 15 PF

Can be applied to forklift trucks. Ideal for turning upside down and moving bins with crossbars. Equipped as standard with quick hooking/unhooking and connection tubes.



CM 180/15 PF

B	Larghezza - <i>Width</i>	mm	1000
C	Altezza - <i>Height</i>	mm	560
H	Baricentro senza carico - <i>Barycentre without load</i>	mm	100
I	Spessore - <i>Thickness</i>	mm	160
α	Angolo di rovesciamento - <i>Tilting angle</i>	°	180°
Q	Portata max. (in trasferimento) - <i>Maximum load (during transfer)</i>	Kg	1500
-	Portata di esercizio (in rovesciamento) - <i>Operating capacity (during tilting)</i>	Kg	700
-	Pressione di esercizio - <i>Operating pressure</i>	bar	140
-	Peso - <i>Weight</i>	Kg	154
-	Linee idrauliche necessarie - <i>Required hydraulic lines</i>	n.	2 (1 leva d.e.) (1 d.c. lever)
-	Forche fisse - <i>Fixed forks</i>		-
-	Forche FEM - <i>FEM forks</i>		Opzionale - <i>Optional</i>

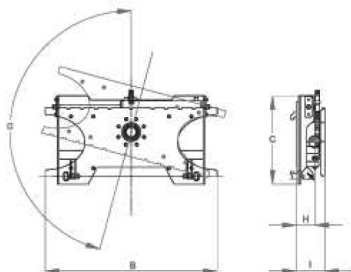

Download the form in [PDF format](#).