



# HYDRAULIC LOAD STABILIZER CM 16 STRFF

## Hydraulic load stabilizer for bins and cases

It can be applied to all telehandlers, front loaders and forklift trucks. It allows the blocking and stabilization of the load to carry out safely all the handling and warehousing operations.


- 1600 kg capacity
- FEM/ EURO linkage
- FEM forks and carriage
- Hydraulic connecting hoses

Available in the versions:

- One central cylinder (850/1100)
- Two hiding lateral cylinders (1150)
- Two central cylinders and extralifting (1700)
- With lateral FEM side shift (TR)

Optional accessories:

Bin holder, case holder, pliable FEM forks.

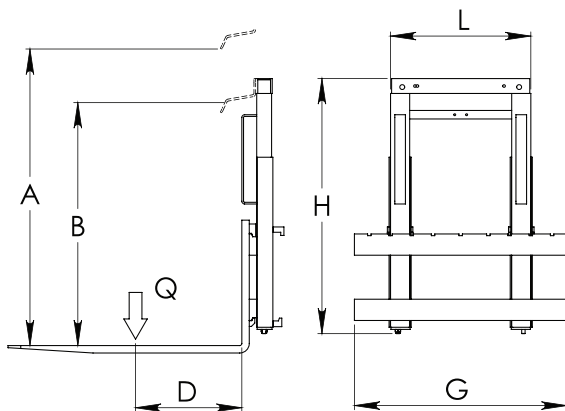

Version	BIN HOLDER			CASE HOLDER			L mm	H mm	G mm	D mm	P kg	TR	F
	Q kg	B mm	A mm	B mm	A mm								
850	1600	1160	1950	1100	1900	660	1200	200 ÷ 1200	500	215	-	1	
1100	1600	1460	2500	1400	2450	660	1500	200 ÷ 1200	500	222	-	1	
1150	1600	1460	2550	1400	2500	660	1500	200 ÷ 1200	500	240	-	1	
1700	1600	1100	2740	1050	2700	660	1150	200 ÷ 1200	500	242	-	1	
850 TR	1600	1160	1950	1100	1900	660	1200	200 ÷ 1200	500	285	100 + 100	2	
1100 TR	1600	1460	2500	1400	2450	660	1500	200 ÷ 1200	500	292	100 + 100	2	
1150 TR	1600	1460	2550	1400	2500	660	1500	200 ÷ 1200	500	310	100 + 100	2	
1700 TR	1600	1100	2740	1050	2700	660	1150	200 ÷ 1200	500	312	100 + 100	2	

**LEGEND:** (B) Minimum opening - (A) Maximum opening - (L) Frame width - (H) Overall dimensions - (G) Width with forks  
(D) Barycentre of the load - (P) Weight - (TR) Side shift - (F) Required hydraulic functions